

RE8040-BLF

Ultra-low pressure grade RO element for low TDS water



www.hscwater.com

+90 212 444 7 472

- Ultra-Low-Energy Consumption



Municipal

SPECIFICATIONS


General Features

| | |
|--------------------------------|---|
| Permeate Flow Rate | 11,500 GPD (43.5 m ³ /day) |
| Nominal Salt Rejection | 99.2% (Minimum 99.0%) |
| Effective Membrane Area | 400ft ² (37.2 m ²) |
| Membrane Type | Thin-Film Composite |
| Membrane Material | Polyamide (PA) |
| Element Configuration | Spiral-Wound, FRP Wrapping |

Test Conditions: 500 mg/L NaCl solution at 100 psig (0.69 MPa) applied pressure; 15% recovery; 77°F (25°C); pH 6.5–7.0; Permeate flow rate for each element may vary +25 / -15%.

Dimensions and Weight

| Model Name | A | B | C | Weight | Part Number | |
|------------|-------------------------|----------------------|------------------------|--------|-----------------|------------|
| | | | | | Inter-Connector | Brine Seal |
| RE8040-BLF | 40.0 inch (1,016 mm) | 7.9 inch (200 mm) | 1.12 inch (28.5 mm) | 15kg | SWA01049 | SWA01043 |

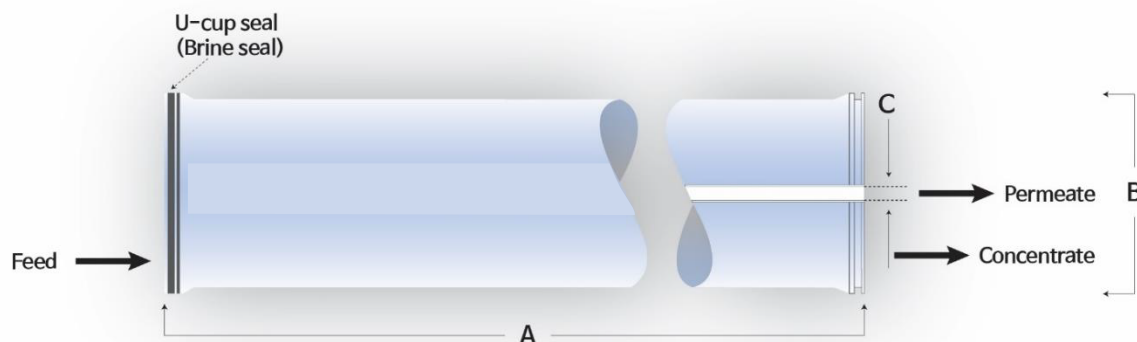

1. Each membrane element supplied with one interconnector (coupler) and four O-rings.
2. All RE8040 elements fit nominal 8.0 inch (203.2 mm) I.D. pressure vessels.

RE8040-BLF

Ultra-low pressure grade RO element for low TDS water



www.hscwater.com

+90 212 444 7 472

APPLICATION DATA

Operating Limits

| | |
|---|----------------------------------|
| Max. Pressure Drop / Element | 15 psi (0.10 MPa) |
| Max. Pressure Drop / 240" Vessel | 60 psi (0.41 Mpa) |
| Max. Operating Pressure | 600 psi (4.14 MPa) |
| Max. Feed Flow Rate | 75 gpm (17.0 m ³ /hr) |
| Min. Concentrate Flow Rate | 16 gpm (3.6 m ³ /hr) |
| Max. Operating Temperature | 113°F (45°C) |
| Operating pH Range | 2.0 – 11.0 |
| CIP pH Range | 1.0 – 13.0 |
| Max. Turbidity | 1.0 NTU |
| Max. SDI (15 min) | 5.0 |
| Max. Chlorine Concentration | < 0.1 mg/L |

- Elements contained in the boxes must be kept dry at room temperature (7–32°C; 40–95°F) and should not be stored in direct sunlight.
- For WET-TYPE, the preservative solution (1% sodium metabisulfite solution) is added to prohibit the growth of micro-organisms.
- Permeate from the first hour of operation should be discarded.
- Stabilized salt rejection is generally achieved within 1~48 hours of continuous use.
- Keep elements moist at all times after initial wetting.
- Avoid excessive pressure and flow spikes.
- Only use chemicals compatible with the membrane elements and components. Use of such chemicals may void the element limited warranty.
- Permeate pressure must always be equal or less than the feed/concentrate pressure. Damage caused by permeate back pressure voids the element limited warranty.
- The element shell is FRP(Fiber Reinforced Plastic). Be aware of glass fiber strands and use safety equipment.



www.hscwater.com

+90 212 444 7 472